


The MIRATECH[®] LTR[™]

Best-in-class LTR (Low-Temperature Regeneration) – Regenerates as Low as 500°F/260°C.

- Designed for maximum reduction of particulate matter (PM) from engine exhaust – up to 97%
- Single-housing assembly contains a DOC and a passive DPF
- Reduces CO, HC, VOC, HAP and PM
- Designed for emergency backup and prime power generators
- Designed to accommodate engines sized from 37 kW to 4 MW
- Provides critical-grade noise reduction, eliminating the need for a separate silencer in many applications
- Can be fitted on Tier 1 and newer engines

Carbon Steel Housings Standard with High-temperature Black Paint

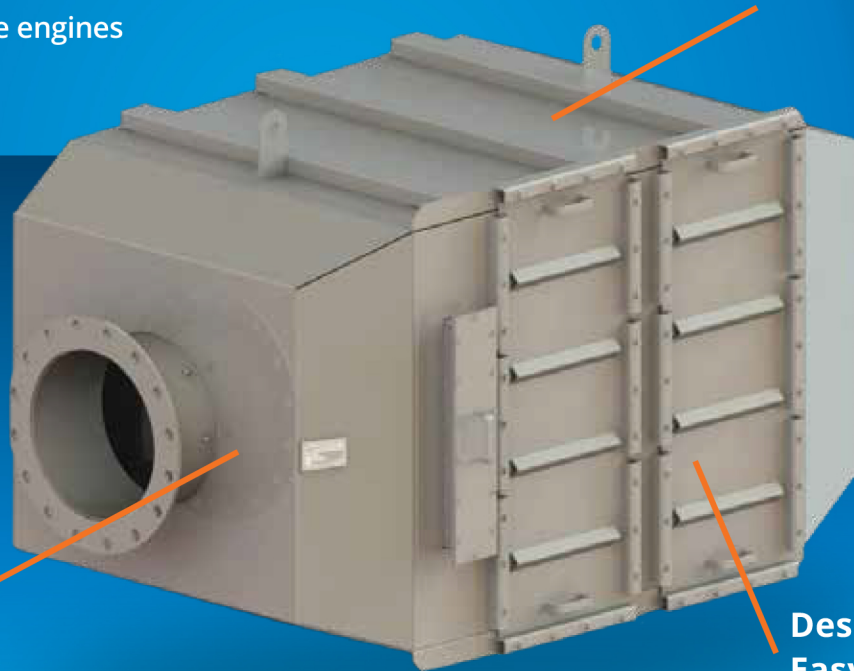

Also Available in 304SS and in 316SS

Designed with Easy-access Service Panels

ENGINEERED TO PERFORM[™]

+1 800-640-3141 | MIRATECHCORP.COM

